



DBAL-A³TM

DUAL BEAM AIMING LASER-ADVANCED³

The third generation DBAL is equipped with an infrared pointer, an infrared pointer/illuminator and your choice of a red or green visible pointer.

The DBAL-A³ provides the same overall functionality as its predecessor, the DBAL-A².

Enhancements include dual remote cable ports that incorporate our OV-2 tactical light by plugging the supplied Y-cable into both the light and the visible override port on the back of the laser housing. Pressing

the Y-cable pressure pad will simultaneously activate the tactical light and the visible laser. The second pressure pad, plugged into the standard port, will activate the infrared laser functions. This unique feature allows for immediate transition from night vision to daylight operations by simply choosing which pressure pad to activate.

Available in Foliage Green, Desert Sand or Black. NSN #6230-22-622-7815.

DBAL-A³ Foliage Green with OV-2 and Y-Cable configuration



DBAL-A³

- IR Pointer (<50mW)
- IR Pointer/Illuminator (<50mW or < *200mW)
- Choice of
 - Red Visible Pointer (<5mW or <65mW) or
 - Green Visible Pointer (<5mW, <30mW, <50mW)

LE/Military only
*Military only



DBAL-A³ Desert Sand shown with OV-2




DBAL-A³ simulated Green Pointer, IR Pointer & IR Illuminator





DBAL-A³ FEATURES

- ▶ Rugged aerospace aluminum housing, MIL-SPEC Type III hardcoat anodized
- ▶ Hi- and Lo-Power modes of laser operation
- ▶ Meets MIL-STD-810G requirements
- ▶ ESD compliant for air worthiness
- ▶ Single adjustment mechanism for both visible and IR pointers
- ▶ Activation / low battery indicator light (123A battery only)
- ▶ Fully adjustable windage and elevation
- ▶ Dual remote cable ports incorporate our OV-2 lights
 - Override remote switch activates the visible laser and tactical light simultaneously
 - Standard remote switch activates the infrared functions
 - Single tap for momentary activation, double tap for continuous ON mode for 5 minutes or until pressed again
- ▶ Supplied with
 - Quick Release HT Mount (Patent Pending)
 - Battery
 - 7" remote cable switch and dual remote cable switch
 - Pattern generators (NSN #1240-01-537-0496)
 - Nylon pouch
- ▶ Manufactured in the U.S.A.

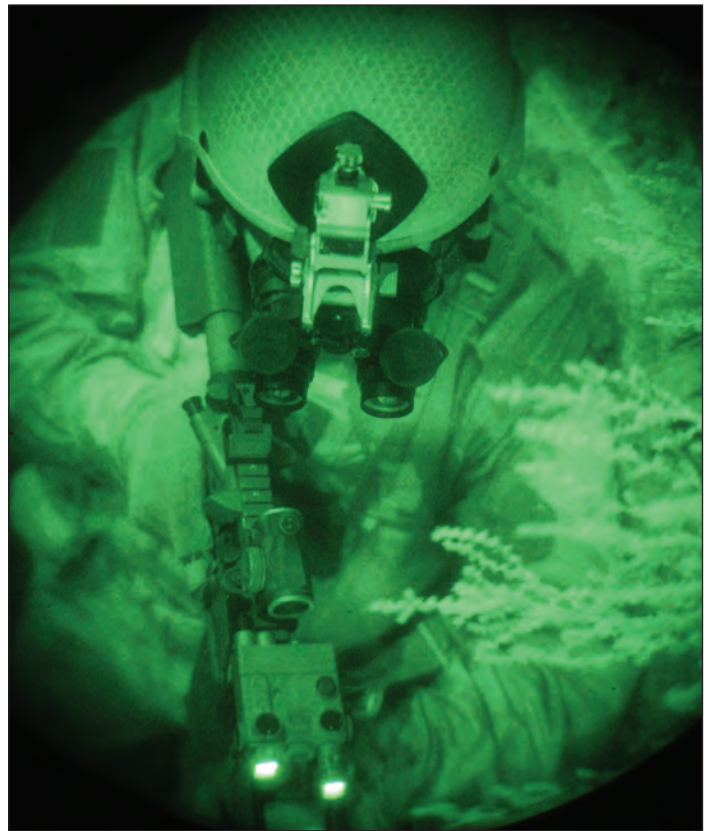

DBAL-A³ ACCESSORIES



OPTIONAL



DBAL-A³ SPECIFICATIONS (PATENT NO. 7,726,061) SEE ATTACHED FOR ADDITIONAL SPECIFICATIONS & WARRANTY

MATERIAL	Anodized aerospace aluminum 6061T-6
WEIGHT (WITH BATTERY)	7.3 ounces / 224 grams
SIZE	L 3.5 in x W 2.89 in x H 1.78 in / L 8.9 cm x W 7.3 cm x H 4.5 cm
ENVIRONMENT	Waterproof to 20 meters
BATTERY	One 3-volt 123A Lithium (1.5-volt AA battery available for certain models. Call for details)
BATTERY LIFE	Up to 5 hours continuous

