

OPERATOR[®]

OP-6 & OP-9 TACTICAL LIGHTS


The *OPERATOR* series of tactical lights can be handheld or mounted with or without a laser on a variety of law enforcement and military weapons. Their compact size, and superior beam quality make the *OPERATOR* lights a requirement for any operation where every ounce counts.

Choose between our 6-volt OP-6 or 9-volt OP-9 lights available with either a bright white incandescent lamp or a high intensity LED.

OPERATOR lights are used worldwide by law enforcement and military personnel who depend on professional grade lights with the versatility and durability to accomplish any mission.

FEATURES

- ▶ Rugged aerospace aluminum housing, MIL-SPEC Type III hard-coat anodized
- ▶ Incandescent or LED
 - 95 lumen (OP-6), 125 lumen (OP-9) shock absorbing incandescent lamp (Patent No. 6,183,106) or
 - <200 lumen recoil-resistant LED
- ▶ Meets MIL-STD-810G requirements
- ▶ Deeply knurled non-slip grip
- ▶ Available with MIL-SPEC-1913 ring mount or quick release mount
- ▶ Interchangeable tailcap switches
 - push button switch or remote cable pressure pad switch
- ▶ Supplied with batteries
- ▶ Optional tip-off filters available in red and blue. Infrared filter available for incandescent lights only
- ▶ Manufactured in the U.S.A.

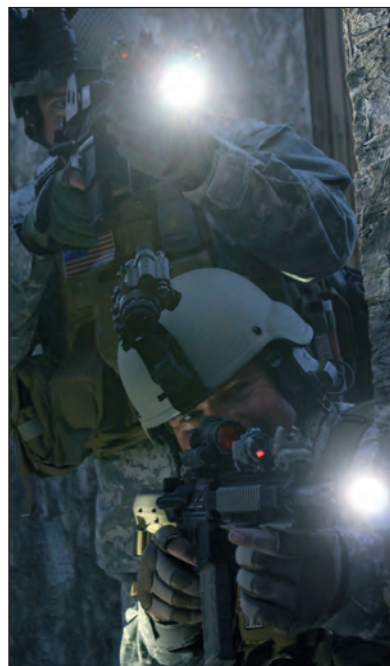

OP-6 LED with MIL-SPEC-1913 Ring Mount



OPERATOR ACCESSORIES

OPTIONAL



Tip-Off Filters



Remote Cable Tailcap



Push Button Tailcap

OPERATOR SPECIFICATIONS SEE ATTACHED FOR ADDITIONAL SPECIFICATIONS & WARRANTY

BATTERY	OP-6: Two 3-volt 123A Lithium OP-9: Three 3-volt 123A Lithium
MATERIAL	Anodized aircraft aluminum 6061T-6
WEIGHT (WITH PUSH BUTTON TAILCAP AND BATTERIES)	OP-6: 4.6 oz / 130.4 grams OP-9: 6.7 oz / 161.6 grams
LENGTH	OP-6: 5.3 in / 13.4 cm OP-9: 6.7 in / 16.9cm
DIAMETER OF HEAD	1.25 in / 3.2 cm
ENVIRONMENT	Waterproof to 20 meters

SPECIFICATIONS

INFRARED POINTERS						
OUTPUT POWER (HI / LO)		WAVELENGTH	CLASS	BEAM DIVERGENCE	RANGE	TEMPERATURE
≈0.7mW (Eye Safe)		850nm	I	0.3 mrad	>250 meters	-40°C – +51°C
<5mW / <1mW		835nm	IIIb	0.3 mrad	600 meters	-40°C – +51°C
<50mW / <1mW		835nm	IIIb	0.3 mrad	2000 meters	-40°C – +51°C
INFRARED ILLUMINATORS						
OUTPUT POWER (HI / LO)		WAVELENGTH	CLASS	BEAM DIVERGENCE	RANGE	TEMPERATURE
<50mW / <1mW		835nm	IIIb	0.5 –75 mrad	2000 meters	-40°C – +51°C
<200mW / <5mW		835nm	IIIb	0.5 –75 mrad	5000 meters	-40°C – +51°C
VISIBLE POINTERS						
TYPE	OUTPUT PWR (HI / LO)	WAVELENGTH	CLASS	BEAM DIVERGENCE	RANGE	TEMPERATURE
Red	<5mW / <1mW	635nm	IIIa	0.3 mrad	500m / 10m	-40°C – +51°C
Red	<65mW / <5mW	642nm	IIIb	0.5 mrad	2000m / 30m	-40°C – +51°C
Green	<5mW / <1mW	532nm	IIIa	0.5 mrad	1500m / 30m	-5°C – +45°C
Green	<30mW / <5mW	532nm	IIIb	0.5 mrad	2500m / 150m	-5°C – +45°C
Green	<50mW / <5mW	532nm	IIIb	0.5 mrad	3500m / 150m	-5°C – +45°C
Green	<200mW / <5mW	532nm	IIIb	0.5 mrad	4500m / 300m	-20°C – +50°C
TACTICAL LIGHTS						
LIGHT TYPE		LAMP TYPE		OUTPUT		BATTERY LIFE
Incandescent		Xenon		95 Lumens		1 hour
LED		Light Emitting Diode		<200 Lumens		1.5 hours

SALE OF LASER PRODUCTS

The sale of high power Visible and Infrared laser products (Class IIIb) are restricted by the FDA to:

- Department of Defense
- Law Enforcement Agencies
- Federal Agencies
- Qualified Agents

Contact Laser Devices, Inc. for further information.

LIMITED WARRANTY

All Laser Devices manufactured products (excluding flashlight bulbs, borelight inserts, batteries or other consumable items) have a 1-year limited warranty from the date of purchase on parts and workmanship. A special 3-year warranty is offered against failure on the LED component used in our LED lights. In addition, a 2-year warranty is offered on our EOLAD family of products. Warranty is void if the serial number or manufacturer's labels have been removed, or if products have been misused, modified, neglected or disassembled prior to return.

At its sole discretion, Laser Devices shall repair or replace products found to be defective under normal use and service. Laser Devices' obligation to either repair or replace shall be the purchaser's sole and exclusive remedy under this warranty. Damage from batteries is not covered. Carefully follow maintenance instructions to prevent battery damage from occurring

Laser Devices disclaims all other warranties, expressed or implied and disclaims any warranties of merchantability or fitness for a particular purpose. Laser Devices shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance.

EXPORT NOTICE

Laser Devices' products are controlled for export purposes under the International Traffic in Arms Regulations (ITAR) and the Export Administration Regulations (EAR), and require U.S. Government authorization prior to the export or transfer to a non-U.S. Person.

Visible laser products are subject to export controls imposed by the U.S. Department of Commerce. Contact Laser Devices, Inc. for details.